



sti-P₃[®] double-wall underground storage tank features a pre-engineered corrosion protection system that provides ongoing monitoring of corrosion protection. The sti-P₃[®] system has provided reliable, long-term performance for over a quarter million steel underground storage tanks.



The only UST design which allows on-going monitoring of corrosion protection

sti-P₃[®] features:

- Meets UL 58, UL 1746-Part 1 and ULC-S603.1
- The only UST design which allows on-going monitoring of corrosion protection, providing peace of mind
- Can be used with a variety of leak detection systems
- Steel provides complete compatibility with all blends of ethanol and biodiesel fuels
- Impermeable to all petroleum products and vapors
- First national UST corrosion control standard with over 40 years of successful performance
- Flat end design reduces the cost of installation and increases site layout flexibility

Additional features:

- Steel inner tank provides structural strength, while its exterior wall is continuously protected with three methods of corrosion control
- Various backfill options allow for money-saving installation
- Capacities range up to 60,000 gallons
- Single or double-wall steel construction

sti-P₃[®] Benefits:

- Steel construction allows for recycling
- Low cost compartments and customization
- Built to nationally-recognized STI standards with strict third-party quality control inspection program




Compatible with a wide range of fuels and chemicals, including biodiesel and ethanol

**PROTECT THE ENVIRONMENT.
BUY RECYCLABLE STEEL TANKS.**



sti-P₃[®] is available from a large network of STI Licensed Manufacturers • www.steeltank.com

sti-P₃[®] Double-Wall Underground Steel Storage Tanks

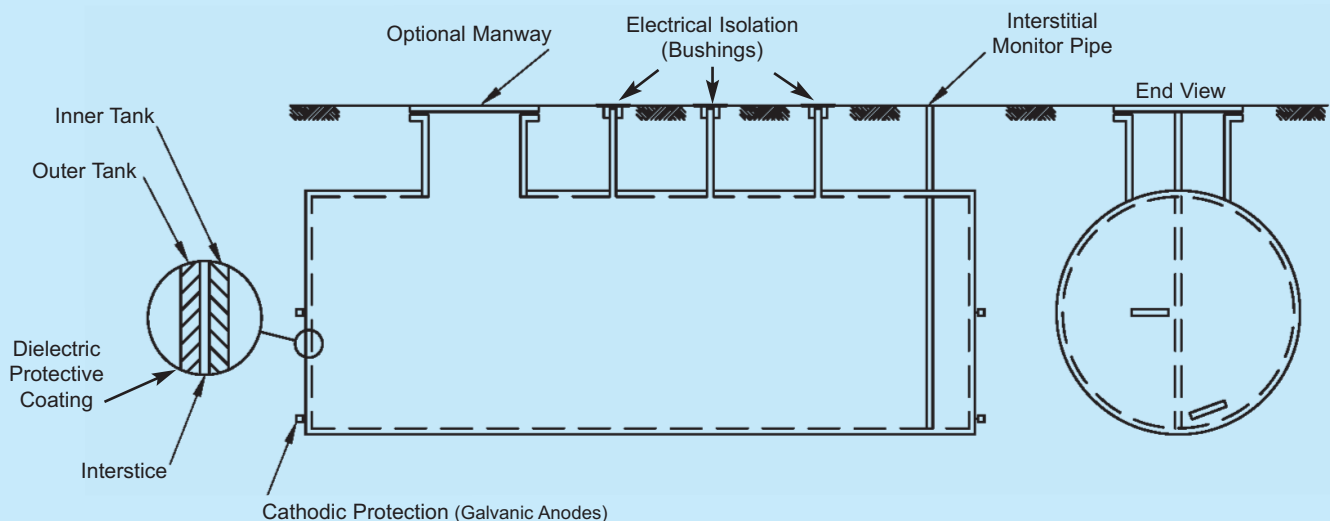

- Steel Tank Institute sti-P₃[®] and UL Labeled
- Compatible with alternative fuels
- Striker plates beneath tank openings

- Flat ends reduce installation costs
- Provides safe and effective secondary containment
- Capacities range up to 60,000 gallons

sti-P₃[®] Guideline Specification

A) General

1. Provide sti-P₃[®] external corrosion and cathodically protected steel underground storage tanks.

B) Labeling

1. Tanks shall bear the Steel Tank Institute sti-P₃[®] identification label.
2. Underground tanks shall bear the appropriate Listing label.

C) Product Description

1. Tanks shall be manufactured in accordance with Steel Tank Institute sti-P₃[®] Specification and Manual for External Corrosion Protection of Underground Steel Storage Tanks.
2. Tanks shall be manufactured and listed in accordance with Underwriters Laboratories UL 58, Steel Underground Storage Tanks for Flammable and Combustible Liquids and UL 1746, External Corrosion Protection Systems for Steel Underground Storage Tanks or ULC-S603.1, Standard for Corrosion Protection for Steel Underground Tanks for Flammable and Combustible Liquids.
3. Double-wall tanks shall provide testable secondary containment on site and access for interstitial leak detection monitoring.
4. Tanks shall be provided with the ability to monitor the corrosion protection system.

D) Manufacturer

1. Manufacturer shall be a licensed member company of the Steel Tank Institute and subject to Steel Tank Institute's Quality Assurance program.



A division of STI/SPFA 944 Donata Court Lake Zurich, IL 60047 Ph: (847)438-8265 Fx: (847)438-8766 Web: www.steeltank.com

sti-P₃[®] is available from an extensive group of Steel Tank Institute fabricators who participate in the STI Quality Assurance Program. Under the program, independent quality control inspectors make unannounced visits to STI members, ensuring fabrication to the highest possible standards.